

ificationsare allowed in the application settings.

nsure the safety and reliability of the equipment.

void damaging the internal circuit.


nulating and affecting the normal operation of the equipment.

ular charging: Keep the battery fully charged to ensure the normal operation of the locator.

ning equipment: Wipe the locator with a clean soft cloth regularly to prevent dust and dirt from

onmental factors. Do not expose the locator to extremely high or low temperatures for a long time

ar: Regularly check the wear of the fixing belt and locator, and replace damaged parts in time to

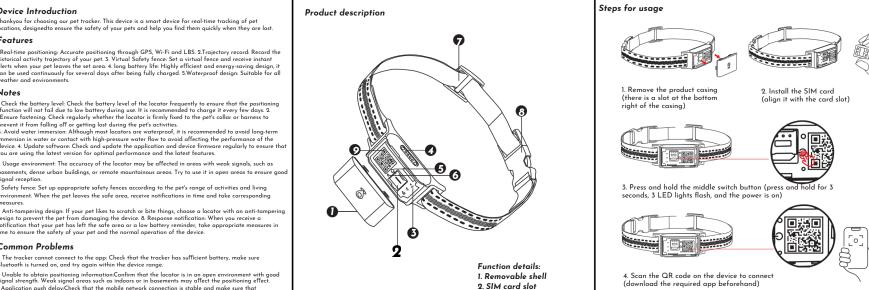

9. Product QR code

(download the required app beforehand) 2. SIM card slot 3. Function indicator light 4. Magnetic charging port 5. Switch 6. Charging indicator light 7. Length adjustment 8. Unlock button

and waterproof and dustproof)

5. Install the product shell back (install the shell back in time to prevent loss

# that it will not fall off.

# .Unpacking inspection: Confirm that the package contains the locator host, charging cable, fixing belt a ser manual. 2.Device charging: Use the included charging cable to charge the locator. The indicator light ll light up during the charging process and turn off when fully charged. 3.Download the app: Search an raload the "365GPS" app in the mobile app store, which supports iOS and Android systems, 4.Register an int: Open the app, use the account or QR code included in the manual, and follow the prompts to mplete the registration process. 5.Bind device: Select "Bind device" in the app and follow the prompts to nd the locator to your account. Make sure the locator is turned on and within the Bluetooth range. 6.Fix APP login. The default login password is the last 6 digits of IMEI. he tracker: Use the fixing strap to firmly fix the positioner in the appropriate position of your pet toensur . Please use our GPS positioning device in compliance with relevant national laws and regulations and ay attention to protecting user privacy. Any user who illegally disassembles, modifies and uses the o protect your personal privacy, please do not disclose your GPS device IMEI number and Since the GPS locator requires your local telecom operator network to provide data Please enter the 15-digit

ease enter the device login password Open the SIM cardslot, insert the SIM card when the device is turned off (LED lights are all o hen press and hold the power button for 3 seconds until 3 LED lights are on, and after about scords the 3.1 ED will. ish alternately (when the yellow light flashes slowly, it means that the GPS device is online on **Power on**: Press and hold the power button for 3 seconds (until 3 LED lights are on).

jumps to the main interface of the APP

roduct for other illegal purposes and occasions will be held legally responsible in accordance with the

issword to anyone. If necessary, please change the password in time. If you accidentally forget the evice login password, please contact after-sales customer service in time.

communication, GPS communication may be delayed in some areas with unstable signals.

(The default login password is the last 6 digits of the device's IMEI number)

Power off: 1. (with SIM card): Press and hold the power button for 8 seconds until 3 LED lights

1. Manually enter IMEI and password to log in (If the user forgets the password after changing the password or accidentally loses and forgets the IMEI, please contact customer service in time) 2. Scan the code to log in to the APP. After the code is successfully scanned, the system automatically Current device

No account yet? Experience

Account name Tip: Each device has a QR code on the body (do not damage it). This QR code is the unique identification code of the device and contains the device 15-digit IMEI number, which is also the only credential for Device List

SIM card and battery mCuortrieonnt sdteavtuicse (Click to display address) Address Lookup not displayed) IMEI number of your device levice and the phone \_\_\_\_\_

Positioning interface

your pet. The accurate address display allows you to know the location of your pet at a glance. Battery power: The upper right corner of the interface displays the remaining power of the device ors the battery status in real time, ensures that the device continues to work, and does not upt the positioning function due to insufficient power. **Network signal**: The device network this displayed next to the battery power to help you understand the connection status be: method: The upper left corner of the main interface displays the current positioning method (suc S, Wi-Fi or cellular network), which automatically switches according to different environments to re the best positioning effect. Movement status: The current movement status of the pet is ed below the location information, such as "stationary" or "moving", to help you understand the of the pet. **Movement speed**: Displays the real-time movement speed of the pet, allowing you

ocation information: In the center of the main interface, you can see the current location information

## APP function interface

Manual refresh

on interface to directly set and view. Note: The

act menu supports adding up to three groups of SOS cy contacts and whitelist numbers can call the Contacts New Contact

Users can find other related functions of the product in

menu, such as: contacts, electronic fence, track, find

power saving, etc. Click to enter the relevant

Number 1: Please order the number 1

Find Device

ce (activate this function, products with speakers will

\_\_\_

After the device is turned off in the "Console"

Users can freely adjust the track playback speed. 4: Please refer to the left figure above for the track lisplay method, and users can switch it at will. 5: The system supports querying the product movement rack within up to 90 days. 6: Users can select the required location on the map and then set the

-

ation (alarm information) Users can view the alarm information of the device in the "Informat

2024-06-14 15:04:12 359339078068817 Moving Alert 2024-06-14 15:04:12 359339078068817

storical tracks and electronic fences The equipment monitor can view the movement track of the injument at any time through the mobile phone APP and set the appropriate range of electronic fences, direction of equipment movement is shown by the arrow in the track in the figure below. It has starting the track query cannot exceed 24 hours. 2 To query the historical track of many days ago, you Users can set the following functions in this interface: elect it in the calendar in the upper left corner of the interface.

ace, it will be completely turned off, Manually ng on the device or charging the device will restart

Console Push Notification ○ Vibration Alarm LED Settings CD Speaker setting Remote Reboot (\*) Device shutdown

B common problem

\_\_\_

noose different positioning modes and location upload intervals according to your needs. Material a: Accurate mode: The default position is automatically refreshed every minute, which is suitable for ergency searches and has high power consumption. b: Power saving mode: Users can set the posit val between 3-120 minutes according to their needs. The longer the interval, the lower the c. c: Sleep mode: The device will enter sleep mode and will not actively upload the position -saving and users can change the positioning mode at will. Change password: After char Network password, please keep the password properly. **Console**: Please enable/disable the necessary op ording to your needs (as shown in the left picture above). **Restore factory settings:** When the GPS tro online in the APP, you can use this option to clear all device data and restore it to factory settings. The ord will also be restored to the default settings when the device left the factory.

Map settings: You can choose different map options according to your needs. Positioning mode: You can

Red light: battery indicator light, slow flashing means normal, fast flashing means low battery,

Yellow light: SIM signal light, slow flashing means normal, fast flashing means searching for signal, Blue light: GPS signal light, slow flashing means normal, fast flashing means searching for signal,

USB to magnetic

DC5V/IA

3.7V/500mAH

(depending on usage)

ABS+ PC

GSM/GPRS/GPS

365GPS

Product Parameters

Charging type

Charging voltage

Battery capacity

Charging time

Battery life

Waterproof leve

Operating temperature

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits e designed to provide reasonable protection against harmful interference n a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the structions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the ollowing measures:

Regrient or relocate the receiving antenna. Increase the separation between the equipment and receiver.

CC Statement

• Connect the equipment into an outlet on a circuit different from that to which

the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help. Caution: my changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, (2) this device must accept any interference received, including interference that may ause undesired operation.

CE FC ROHS 🖺 🗵 🛟 MADE IN CHINA

# Specific Absorption Rate (SAR) information:

s device meets the government's requirements for exposure to radio ves. The guidelines are based on standards that were developed by ndependent scientific organizations through periodic and thorough evaluation scientific studies. The standards include a substantial safety margin signed to assure the safety of all persons regardless of age or health. FCC Exposure Information and Statement the SAR limit of USA (FCC) is 1.6 W/ averaged over one gram of tissue. Device types: Laptop has also been ted against this SAR limit. This device was tested for typical body-worn erations with the back of the device kept Omm from the body. To maintain pliance with FCC RF exposure requirements, use accessories that maintain O mm separation distance between the user's body and the back of the device. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy ese requirements may not comply with FCC RF exposure requirements, and should be avoided.

You candownloaditbysearching on Android and Apple stores